

Data Device Corporation 1-800-DDC-5757 | 631-567-5600

1-800-DDC-5757 | 631-567-5600 105 Wilbur Place, Bohemia, NY 11716 service@ddc-web.com | www.ddc-web.com



Mil-Std-1553/1760 Products NHI-15116 Series +5V Monolithic Dual Transceivers

Features:

- Fully Compliant, Mil-Std-1553A/B Mil-Std-1760, MacAir Dual Transceivers !!
- Single +5V Supply !!
- 1.5 Watts Maximum Power Dissipation @ 100% Duty Cycle !!
- Output Driver Withstands Short Circuit Fault
- Proprietary Monolithic Design Provides Superior Reliability, with outstanding Thermal Impedance Characteristics!!
- Superior Noise Performance Characteristics


Description:

The NHI-15116 series of Mil-Std-1553/1760 monolithic dual transceivers are available in 0.800" x .600" 24 pin flatpack package.

Each receiver converts the 1553 bus bi-phase data to complementary RX and RX_L TTL digital outputs for use by the manchester decoder. The device provides independent receiver enables for each channel.

The transmitters will output bi-phase manchester to the coupling transformer when the TX and TX_L inputs are driven by complementary TTL digital data. The device provides an independent transmitter inhibit TXINH for each channel.

To reduce the pin count and package size, the transmitter outputs are connected to the receiver inputs internal to the device for each channel. This results in only two connections BUS & BUS_L to the coupling transformer per channel.

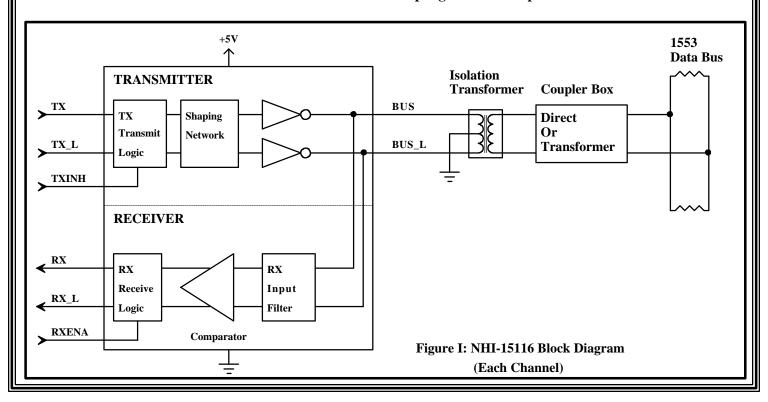

NHI-15116 Series

TABLE I: Electrical Specifications

Parameter	Condition	Symbol	Min	Тур	Max	Units
POWER SUPPLY REQUIREMENT		Vec	4.7		5.5	V
TOTAL SUPPLY CURRENT	Vcc=5.0V, Not Transmitting	Icc1		70	80	mA
	Vcc=5.0V, Transmit one channel @ 50% duty cycle	Icc2		320	340	mA
	Vcc=5.0V, Transmit one channel @ 100% duty cycle	Icc3		570	615	mA
POWER DISSIPATION	Vcc=5.0V, Not Transmitting	Pd1			0.4	W
	Vcc=5.0V, Transmit one channel @ 100% duty cycle	Pd2			1.5	W
OPERATING TEMPERATURE	Junction Tj -55 165	°C				
	Case	Tc	-55		125	°C
	Storage	Ts	-55		165	°C
THERMAL IMPEDANCE	Junction to Case	θјс			4	°C/W
LOGIC I/O		•				
RXENA_A, TXA, TXA_L, TXINH_A, RXENA_B, TXB, TXB_L, TXINH_B	Jone 1. 10 June 1. 10	mA				
	Vcc= 4.7v, Vih= 2.7V	Iih			20	uA
RXA, RXA_L, RXB, RXB_L	Vcc= 5.5V, Iol= -4mA	Vol			0.4	V
	Vcc= 4.7v, Ioh= 400 uA	Voh	2.7			V
RECEIVER						
Input Resistance	Differential	Rin	20			kΩ
Input Capacitance	Differential	Cin			5	pF
Common Mode Rejection Ratio		CMRR	40			dB
Input Level	Differential	Vin			40	Vpp
TRANSMITTER						
Output Voltage	Across 140 Ω load	V _{out}	29		36	Vpp
Rise/Fall Time	10% to 90% of peak to peak output	t _r , t _f	100	150	300	nS
Output DynamicOffset Voltage	Across 35 Ω load	Vdyn	-90		90	mV
Ouput Noise	Differential	Vnpp			10	mVpp
Output Resistance	Differential, not transmitting	Rout	10			kΩ


Note: Typical receiver threshold is 0.9v pk-pk, reference to the bus.

NHI-15116 Series

Table II: Pin Functions				
Pin#	Function	Pin#	Function	
1	BUS_A	24	TXA_L	
2	BUS_A_L	23	TXA	
3	GND_A	22	TXINH_A	
4	RXA	21	GND_A	
5	RXENA_A	20	+5V_A	
6	RXA_L	19	GND_A	
7	BUS_B	18	TXB_L	
8	BUS_B_L	17	TX_B	
9	GND_B	16	TXINH_B	
10	RXB	15	GND_B	
11	RXENA_B	14	+5V_B	
12	RXB_L	13	GND_B	

Transformer Requirements:

The NHI-15116 series requires a transformer with a turns ratio 1:2.5 for Direct Coupling, and a turns ratio of 1:1.79 for Transformer Coupling to the Mil-Std-1553 Bus. Please contact Beta Transformer (www.bttc-beta.com) for a recommended transformer. The center tap on the transceiver side of the isolation transformer must be grounded.







Figure III: Flatpack Package Detail

Table III: Flatpack Dimensions


DIM	TYP	TOL
	(inches)	(+/- inches)
A	0.800 "	0.008 "
В	11 EQ SP @	0.050 = 0.550 "
С	0.590 ''	0.006 "
D	0.090 ''	0.008 "
E	0.060 "	0.010 "
F	0.500 "	MIN
G	0.015 "	0.002 "
Н	0.010 "	0.002 "

NHI-15116 Series

Transmit Waveforms

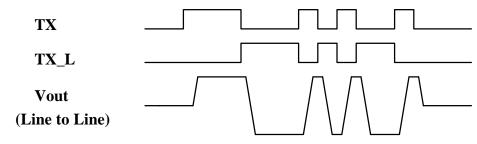

Receive Waveforms

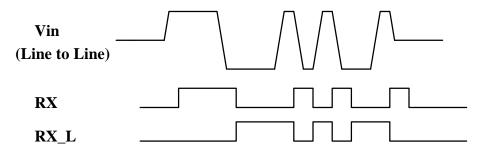

Transmitter Operation:


A high level input on TXINH will inhibit the transmitter outputs. If the TX & TX_L transmitter inputs are both high or both low, the transmitter is also inhibited. The output drivers are short circuit protected and the device will "fold back" to decrease power dissipation under this condition until the fault is removed.

Receiver Operation:

A low level input on RXENA will disable the receiver outputs RX & RX_L regardless of bus activity. The receiver output compatibility may be specified as logic 0 or logic 1 when in standby mode.

** See Ordering Information

Ordering Information:

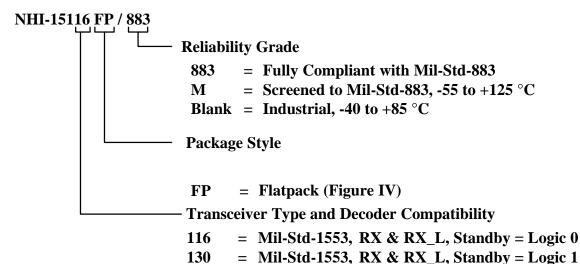

See QML-38534 for NHI's Manufacturer Qualification Under Mil-PRF-38534







The first choice for more than 50 years—DDC

DDC is the world leader in the design and manufacture of high reliability data interface products, motion control, and solid-state power controllers for aerospace, defense, and industrial automation.

Inside the U.S. - Call Toll-Free 1-800-DDC-5757

Headquarters and Main Plant

105 Wilbur Place, Bohemia, NY 11716-2426 Tel: (631) 567-5600 Fax: (631) 567-7358 Toll-Free, Customer Service: 1-800-DDC-5757

Web site: www.ddc-web.com





in Data Device Corporation

Outside the U.S. - Call 1-631-567-5700

United Kingdom: DDC U.K., LTD

Mill Reef House, 9-14 Cheap Street, Newbury, Berkshire RG14 5DD, England

Tel: +44 1635 811140 Fax: +44 1635 32264

France: DDC Electronique 10 Rue Carle-Herbert 92400 Courbevoie France

Tel: +33-1-41-16-3424 Fax: +33-1-41-16-3425

Germany: DDC Elektronik GmbH

Triebstrasse 3, D-80993 München, Germany

Tel: +49 (0) 89-15 00 12-11 Fax: +49 (0) 89-15 00 12-22

Japan: DDC Electronics K.K.

Dai-ichi Magami Bldg, 8F, 1-5, Koraku 1-chome, Bunkyo-ku, Tokyo 112-0004, Japan Tel: 81-3-3814-7688 Fax: 81-3-3814-7689 Web site: www.ddcjapan.co.jp

Asia: Data Device Corporation - RO Registered in Singapore

Blk-327 Hougang Ave 5 #05-164

Singapore 530327 Tel: +65 6489 4801

The information in this Data Sheet is believed to be accurate; however, no responsibility is assumed by Data Device Corporation for its use, and no license or rights are granted by implication or otherwise in connection therewith. Specifications are subject to change without notice.