



Mil-Std-1553 Products

Single Channel Hybrid Transceivers

Features/Applications:

- Available for +15V, +12V, and +5V Only Applications
- Very Low Standby Power
- Low Thermal Resistance
- Very Low Dynamic Offset
- Short Circuit Proof
- Superior Noise Performance
- Screened to Mil-PRF-38534

Description:

The NHI family of single transceivers are available in 1.275" x .780", 24 pin plug-in and flatpack packages.

The receiver converts the 1553 bus bi-phase data to complementary RX and RX_L TTL digital outputs for use by the manchester decoder. The device provides a receiver enable strobe input to control the outputs of the received data. Devices are available with receiver outputs normally HIGH or LOW during standby mode for compatibility with industry standard decoders.

The transmitter will output bi-phase manchester to the coupling transformer when the TX and TX_L inputs are driven by complementary TTL digital data. The device provides a transmitter inhibit input TXINH to disable the transmitter.

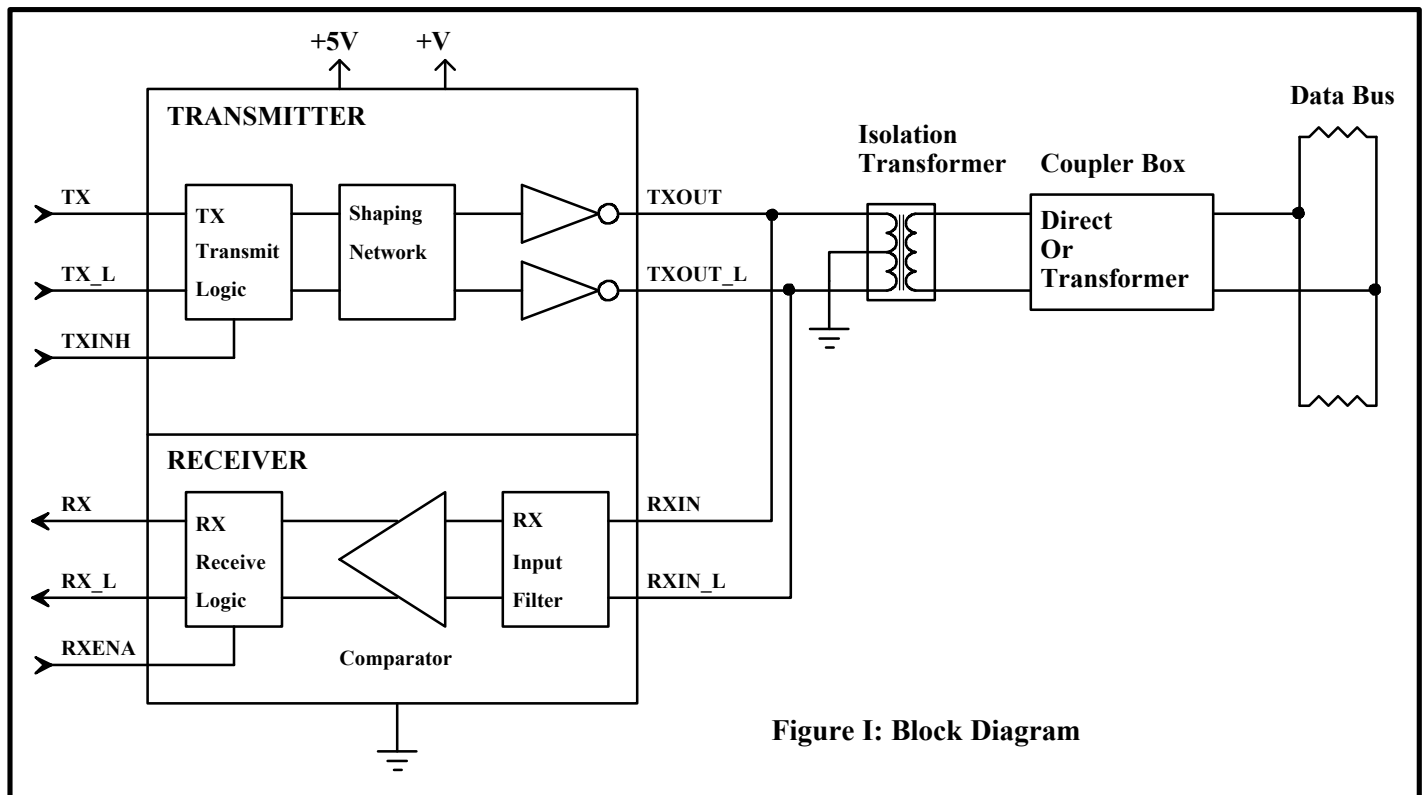


Figure I: Block Diagram

Single Channel Transceivers

Transformer Requirements:

The NHI-15XX series of single channel transceivers require a transformer in order to couple to the Mil-Std-1553 Bus.

The turns ratios required for both Direct and Transformer Coupling for each device type are outlined in the table below. Please contact Beta Transformer (www.bttc-beta.com) for a recommended transformer.

The center tap on the transceiver side of the isolation transformer must be grounded.

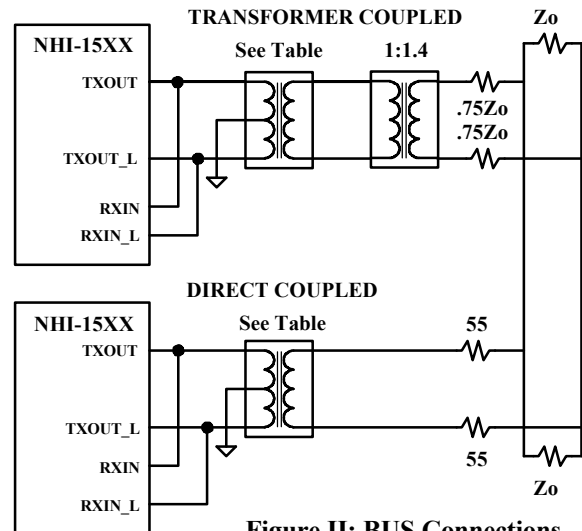


Figure II: BUS Connections

Device	Power Supply +V	Transformer Turns Ratio Direct	Transformer Turns Ratio Stub
NHI-1508	+15V	1.40:1.00	2.00:1.00
NHI-1509	+15V	1.40:1.00	2.00:1.00
NHI-1510	+15V	1.40:1.00	2.00:1.00
NHI-1531	+12V	1.25:1.00	1.66:1.00
NHI-1534	+5V Only	1.00:2.12	1.00:1.50
NHI-1535	+5V Only	1.00:2.12	1.00:1.50
NHI-1545	+12V	1.25:1.00	1.66:1.00

Single Channel Transceivers


+5V Only Device Pin Functions

Pin#	Function	Pin#	Function
1	TXOUT	24	NC
2	TXOUT_L	23	TX_L
3	GND	22	TX
4	NC	21	TXINH
5	NC	20	+5V
6	NC	19	NC
7	RX	18	GND
8	RXENA	17	NC
9	GND	16	RXIN_L
10	RX_L	15	RXIN
11	NC	14	NC
12	NC	13	NC


+15V & +12V Device Pin Functions

Pin#	Function	Pin#	Function
1	TXOUT	24	NC
2	TXOUT_L	23	TX_L
3	GND	22	TX
4	NC	21	TXINH
5	NC	20	+5V
6	NC $\sqrt{1}$	19	NC
7	RX	18	GND
8	RXENA	17	NC
9	GND	16	RXIN_L
10	RX_L	15	RXIN
11	NC	14	NC
12	NC	13	+V

$\sqrt{1}$ Control voltage input TXVOC for NHI-1508 variable transmitter output transceiver.

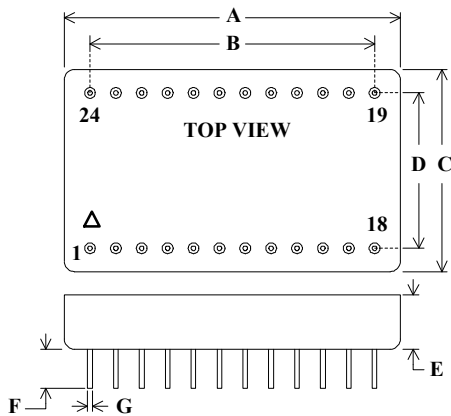

24 Pin Plug-In Package Detail

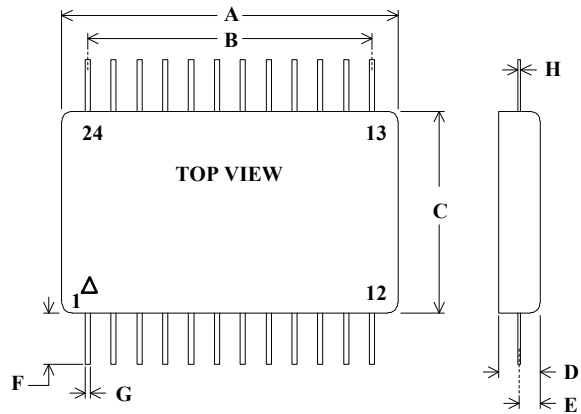

24 Pin Flatpack Package Detail

24 Pin Plug-In Dimensions

DIM	TYP (inches)	TOL (+/- inches)
A	1.270 "	0.010 "
B	11 EQ SP @	0.100 = 1.700 "
C	0.770 "	0.010 "
D	0.600 "	0.010 "
E	0.215 "	MAX
F	0.175 "	MIN
G	0.018 " DIA.	0.002 "


24 Pin Flatpack Dimensions

DIM	TYP (inches)	TOL (+/- inches)
A	1.275 "	0.010 "
B	11 EQ SP @	0.100 = 1.100 "
C	0.775 "	0.010 "
D	0.175 "	MAX
E	0.072 "	0.010 "
F	0.500 "	MIN
G	0.015 "	0.003 "
H	0.010 "	0.002 "

Single Channel Transceivers

Ordering Information:

NHI-1508 FP / 883

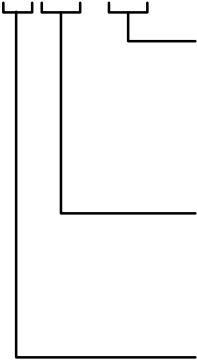

Reliability Grade

883 = Fully Compliant with Mil-Std-883

M = Military, -55 to +125 °C

Blank = Industrial, -40 to +85 °C

Package Style

Blank = Plug-In

FP = Flatpack

Decoder Compatibility

08 = +15V, Variable Output, RX & RX_L, Standby = Logic 0

09 = +15V, RX & RX_L, Standby = Logic 0

10 = +15V, RX & RX_L, Standby = Logic 1

31 = +12V, RX & RX_L, Standby = Logic 0

34 = +5V, RX & RX_L, Standby = Logic 0

35 = +5V, RX & RX_L, Standby = Logic 1

45 = +12V, RX & RX_L, Standby = Logic 1

See QML-38534 for NHI's Manufacturer Qualification Under Mil-PRF-38534



DATA DEVICE CORPORATION
 REGISTERED TO:
 ISO 9001:2008, AS9100C:2009-01
 EN9100:2009, JIS Q9100:2009
 FILE NO. 10001296 ASH09



The first choice for more than 50 years—DDC

DDC is the world leader in the design and manufacture of high reliability data interface products, motion control, and solid-state power controllers for aerospace, defense, and industrial automation.

Inside the U.S. - Call Toll-Free 1-800-DDC-5757

Headquarters and Main Plant

105 Wilbur Place, Bohemia, NY 11716-2426
 Tel: (631) 567-5600 Fax: (631) 567-7358
 Toll-Free, Customer Service: 1-800-DDC-5757

Web site: www.ddc-web.com



Data Device Corporation

Outside the U.S. - Call 1-631-567-5700

United Kingdom: DDC U.K., LTD

Mill Reef House, 9-14 Cheap Street, Newbury,
 Berkshire RG14 5DD, England
 Tel: +44 1635 811140 Fax: +44 1635 32264

France: DDC Electronique

10 Rue Carle-Herbert
 92400 Courbevoie France
 Tel: +33-1-41-16-3424 Fax: +33-1-41-16-3425

Germany: DDC Elektronik GmbH

Triebstrasse 3, D-80993 München, Germany
 Tel: +49 (0) 89-15 00 12-11
 Fax: +49 (0) 89-15 00 12-22

Japan: DDC Electronics K.K.

Dai-ichi Magami Bldg, 8F, 1-5, Koraku 1-chome,
 Bunkyo-ku, Tokyo 112-0004, Japan
 Tel: 81-3-3814-7688 Fax: 81-3-3814-7689
 Web site: www.ddcjapan.co.jp

Asia: Data Device Corporation - RO Registered in Singapore

Blk-327 Hougang Ave 5 #05-164
 Singapore 530327
 Tel: +65 6489 4801